
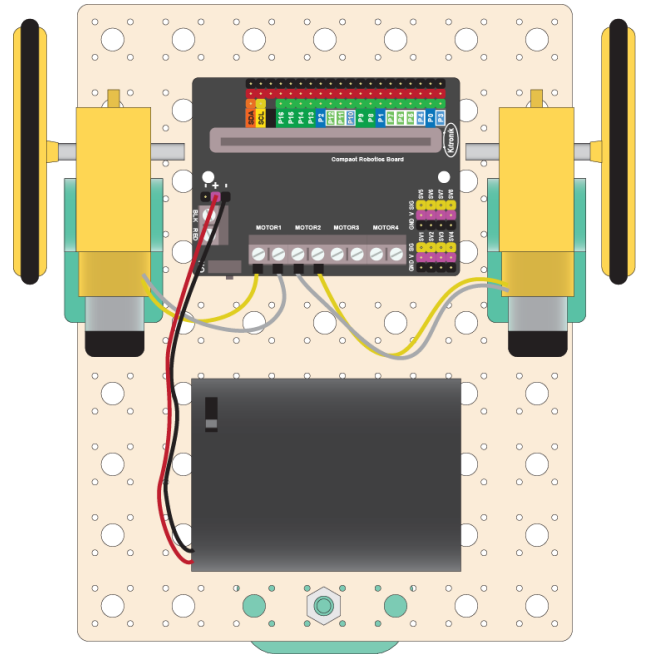



# Add a Speed Control to your Remote

In this workshop you will add a speed control to your remote controller.

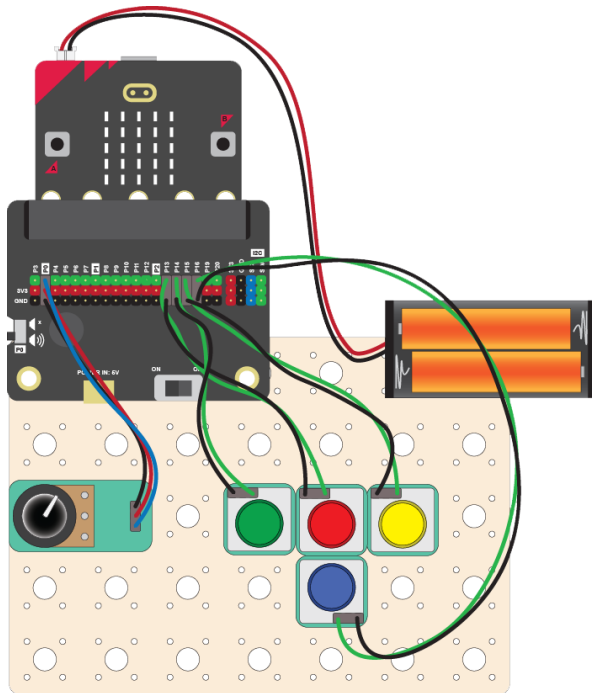

For the speed control you add a potentiometer to the remote control. This is an analogue input device. By turning the knob, you can get different values from 0 to 100 which can be used to set the speed. When we read the value from the potentiometer on the controller, we need to send the value across to the robot, so it can adjust its speed

## Controller Microbit

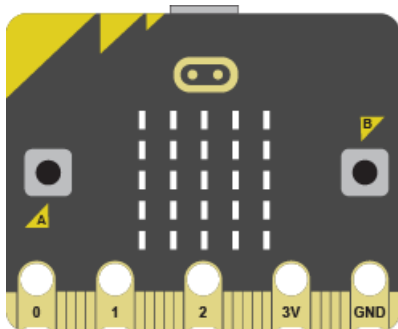

## Messages:

F for Forwards


L for Left

R for Right

B for Backwards

speed=value

## Robot Microbit

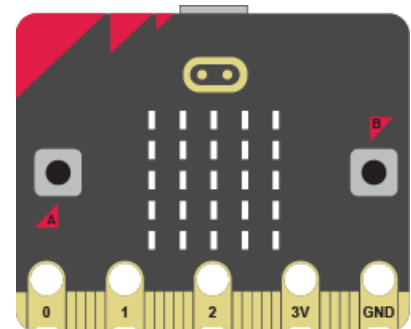


## What to do

- If you haven't already done so, build the robot and remote control by referring to the previous worksheets.
- Then follow this worksheet to use the potentiometer to control the speed of your robot's forward movement.
- Finally, attempt the coding challenge to adjust the speed of the turning and reversing

# Assemble the Speed Control

## Add the Potentiometer

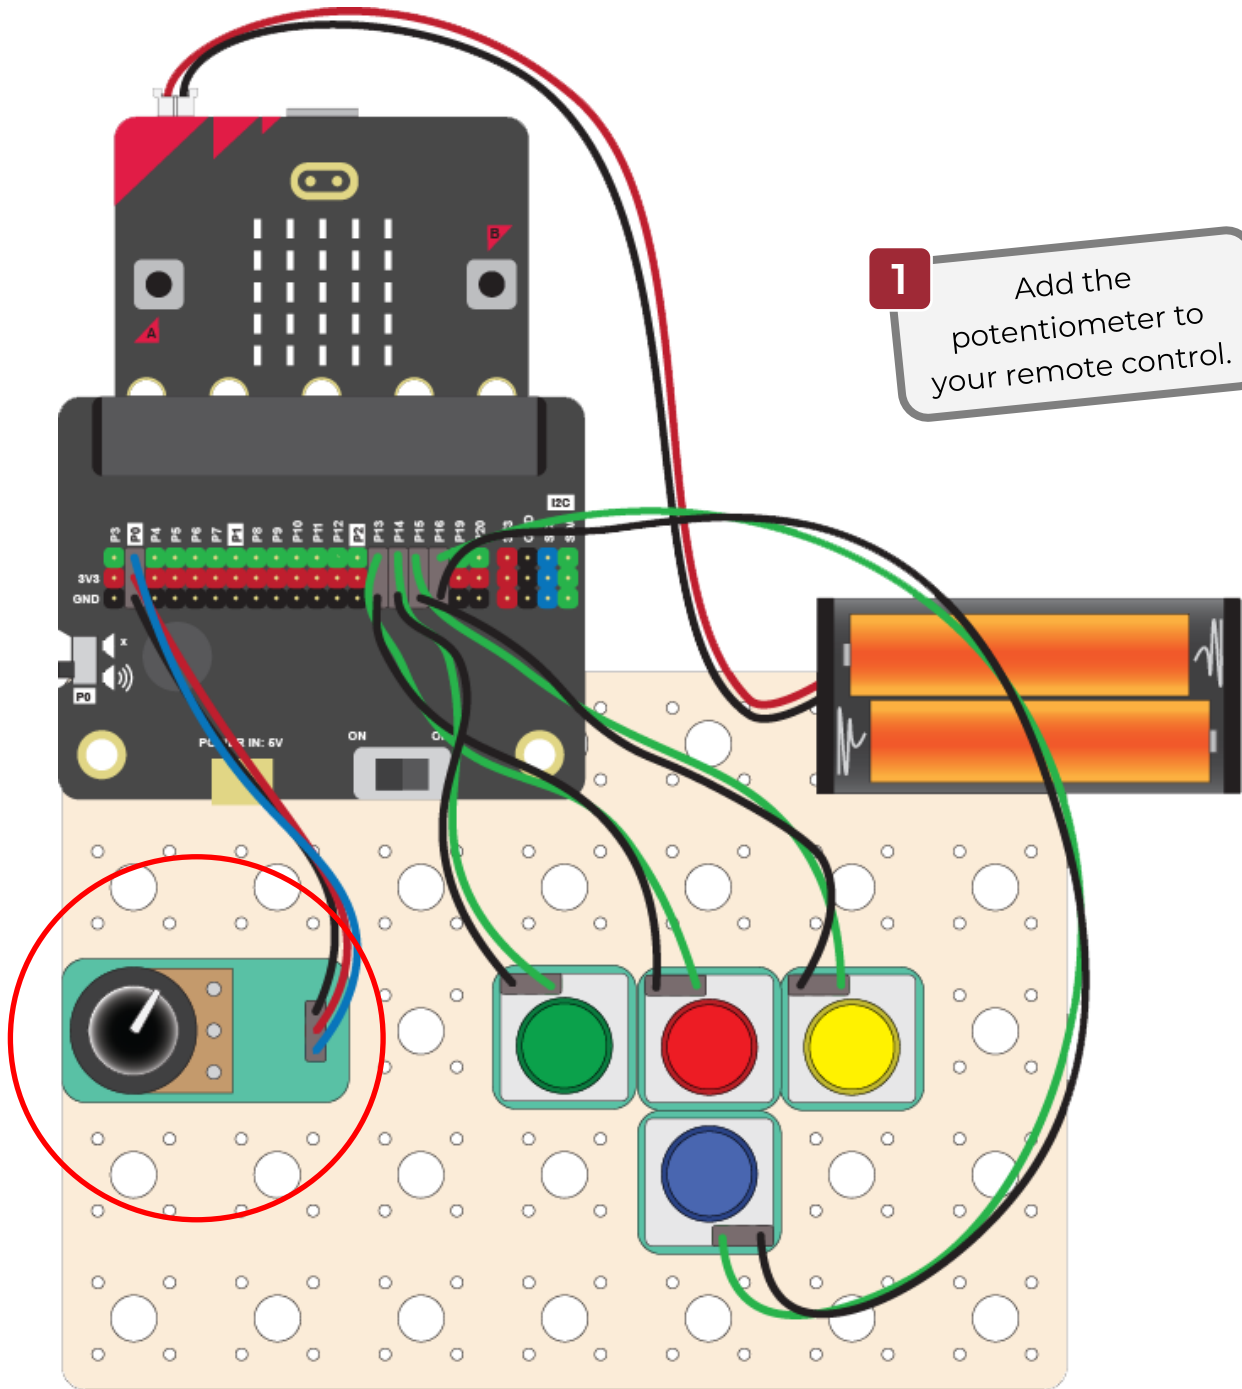

**1** Add the potentiometer to your remote control.

**2** Wire up the potentiometer as follows using a GVS wire

Component	Microbit Connections	Purpose
Potentiometer	P0	Speed control

# Code the Controller

## Find your Controller Code

Refer back to the worksheet **Add a Remote Control for your Robot**.

This should have given you code that looks like this →

In the **on start** block it sets up the radio channel and the 4 buttons. Then in the **forever** block it sends messages to the robot when each button is pressed.

```
on start
  radio set group 9
  set pull pin P13 to up
  set pull pin P14 to up
  set pull pin P15 to up
  set pull pin P16 to up

forever
  clear screen
  if digital read pin P13 == 1 then
    radio send string 1
    show leds
  else if digital read pin P14 == 1 then
    radio send string 2
    show leds
  else if digital read pin P15 == 1 then
    radio send string 3
    show leds
  else if digital read pin P16 == 1 then
    radio send string 4
    show leds
  else
    radio send string 5
    pause (ms) 100
```

## Send the Speed to the Robot

Now get your controller to send the speed according to the setting of the potentiometer.

```
forever
  set pot to analog read pin P0
  radio send value speed = map pot from low 0 high 1023 to low 0 high 100
  pause (ms) 200
```

1 Add this code

Read the potentiometer. This will be a value from 0 to 1023

Convert the potentiometer value of 0 to 1023 to a speed value of 0 to 100. Then send the speed to the robot

Wait a bit so we don't send too many values

2 Download the code to the controller Microbit

Download

# Code the Robot 1

## Find your Robot Code

Refer back to the worksheet **Add a Remote Control for your Robot**.


This should have given you code that looks like this —>

In the **on start** block it sets up the radio channel. Then in the **forever** block it responds to messages from the controller to control the robot's movements.



## Set up a Speed Variable

The speed of the robot will vary according to the speed value sent from the controller. When we receive the speed message, we need to store the speed value so that we can use it to drive the robot speed.

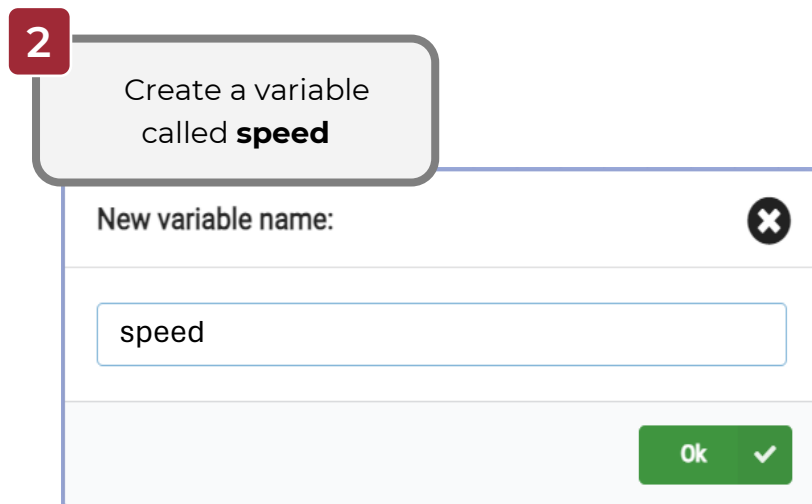

# Code the Robot 2

## Receive and Respond to the Speed Message

At the moment the robot's movements are a fixed speed. We need to receive the speed message from the controller and store it in speed variable. We can then use this variable to instead of the fixed speeds.

1 Add this code

```
on radio received name value
  if name = "speed" then
    set speed to value
```


When we get a speed message, save the value in the speed variable

2 Change this code

```
on radio received receivedString
  if receivedString = "F" then
    Motor 1 on direction Forward speed speed
    Motor 2 on direction Forward speed speed
  else if receivedString = "L" then
```

Change the fixed speeds to the speed variable

3 Download the code to the robot Microbit



### Your challenge!

You should be able to control the speed of the forward movement of the robot. Can you now control the speed of the left, right and backwards movements of the robot?



# Solution

## Robot

All the changes can be done on the robot code. You can use the same speed variable to adjust the motor speeds for the different movement directions.

```
on radio received receivedString
  if receivedString = "F" then
    Motor 1 on direction Forward speed speed
    Motor 2 on direction Forward speed speed
  else if receivedString = "L" then
    Motor 1 on direction Forward speed 0
    Motor 2 on direction Forward speed speed
  else if receivedString = "R" then
    Motor 1 on direction Forward speed speed
    Motor 2 on direction Forward speed 0
  else if receivedString = "B" then
    Motor 1 on direction Reverse speed speed
    Motor 2 on direction Reverse speed speed
  else
    turn off Motor 1
    turn off Motor 2
```

The image shows a Scratch script for a robot. It starts with an 'on radio received' block containing a 'receivedString' variable. This is followed by an 'if' block with four 'else if' conditions and an 'else' block. Each condition checks for a specific string: 'F', 'L', 'R', and 'B'. For 'F', both Motor 1 and Motor 2 are set to 'Forward' with a speed of 'speed'. For 'L', Motor 1 is set to 'Forward' with a speed of 0, and Motor 2 is set to 'Forward' with a speed of 'speed'. For 'R', Motor 1 is set to 'Forward' with a speed of 'speed', and Motor 2 is set to 'Forward' with a speed of 0. For 'B', both Motor 1 and Motor 2 are set to 'Reverse' with a speed of 'speed'. The 'else' block contains two 'turn off Motor' blocks for Motor 1 and Motor 2. The script ends with a '+' sign in a blue block.

